

















MEDICAL GAS EQUIPMENT

TYPE	INLET PRESSURE (bar)	OUTLET PRESSURE (bar)	FLOW (Nm ³ /h)	SPECIFICATIONS	
T2m	200	9,5 - 11	44	Automatic change-over unit	
CENTREOLE	200	15,5 - 18,5 9,5 - 11	150	High flow automatic change-over unit	
SS2m	200	5 - 9	44	Automatic outlet device for the reserve supply	
SSEOLE	200	5 - 9	150	High flow outlet device for the reserve supply	
HP FLEX HOSE	200	200	-	Liner Stainless steel + Stainless steel braids Connection to request	
PIGTAIL HP	200	200	-	Copper or SS	
HEATER	200	200	-	Electric heaters 500W or 1000W	
HP STAND	200	200	-	Connection from bundle to pipeline	
EUM 50 / 200	12	12	44 / 150	Emergency and maintenance inlet (VSP)	
BALL VALVE	20	-	-	Low pressure ball valve. From 3/8" to 2" diameter	
VALVE UFM	20	-	-	Valve + medical outlet	
D300MV	30	1 - 12	100	Dual line regulating assembly	
D800MV	30	1 - 12	320	Dual line regulating assembly	
BP RANGE	30	0,5 - 12	100 - 300 500 - 800	Low pressure line regulator	
D300ML	12	4 - 10	40	Dual second stage regulating assembly	
ROTAREG	20	4 - 12	40	Second stage regulator assembly	

ENGINEERING PANEL SOLUTIONS



CE MARKED CUSTOM MADE PANELS READY TO INSTALL

- Example :
- 2 liquids + 1 gas
 - 1 liquid + 2 gases
 - 3 gases ...



ALARM




- Up to 9 remotes
- 8 logic or analogic inputs
- CE Medical marked
- Alarm units are connected together and to the computer by RS 485 BUS
- Gas : O₂ - Air - Air800 - CO₂ - N₂O - Vacuum




Pressure transducer

MEDICAL GAS EQUIPMENT

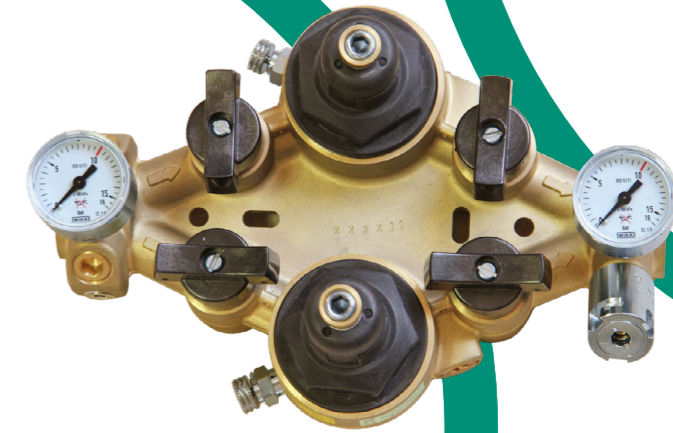

H HOSPITAL

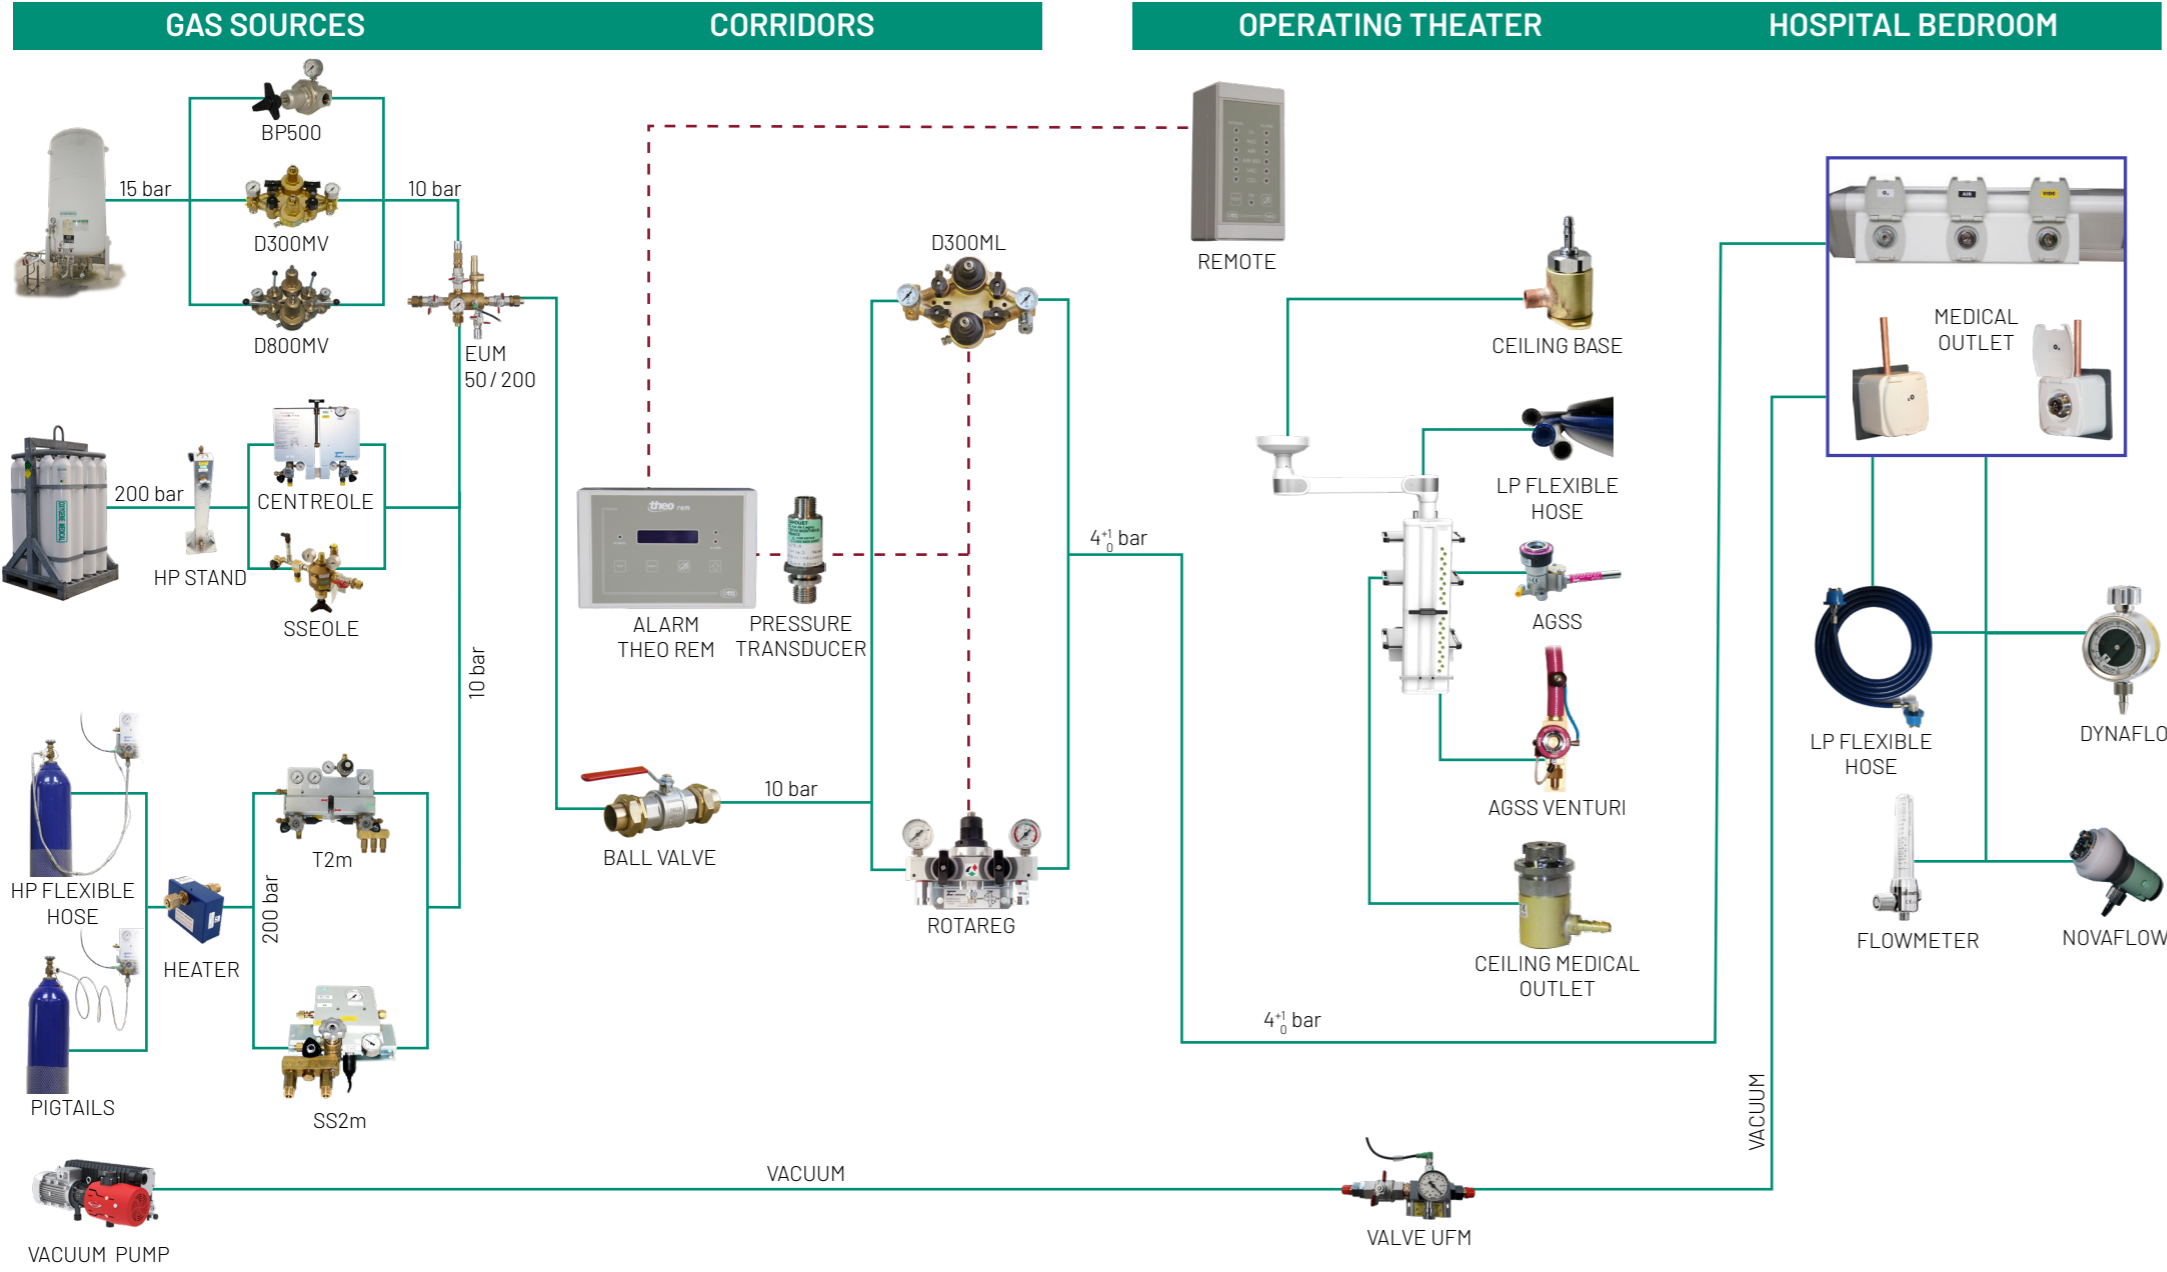

MEDICAL GAS EQUIPMENT

TYPE	INLET PRESSURE (bar)	OUTLET PRESSURE (bar)	FLOW	SPECIFICATIONS	
SAM	200	0 - 10	13,5 Nm ³ /h	Cylinder regulator with terminal unit outlet	
NOVA 40	200	0 - 4	50 Nm ³ /h	Cylinder regulator with terminal unit outlet	
NOVABLOC	200	-	0,1 - 15 lpm	Flowmeter regulator	
DYNABLOC	200	-	0,5 - 50 lpm	Paddle action flowmeter regulator	
NOVAFLOW	2,7 - 6	-	0,1 - 15 lpm	Calibrated orifices flowmeter	
DYNAFLOW	4	-	0,5 - 50 lpm	Paddle action flowmeter	
FLOW-METER	4,5	-	0 - 40 lpm	Flowmeter	
LP FLEX	10	-	-	LP flexible hose	
THEO MEDICAL OUTLET	10	10	-	AFNOR outlet (wall, bedhead, ceiling pendant) (Maximum operating pressure 10 bar)	
AGSS	Vacuum	-	-	Air powered or vacuum	

COMPACT INTEGRATED REGULATING VALVE V2D15

- Gas & AIR (O₂ / N₂ 0 50% / 50%)
- Medical O₂ - O₂ / CO₂
- 200 bar
- Up to 50 lpm
- Weight : 1,2 kg



INTERNATIONAL STANDARD CONNECTION
 CAHOUE can supply equipment with your own country standard (CGA - DIN - AFNOR - UNI - MIE - BS - ABNT - IRAM - NEN - JIS - IS ...).

Do not hesitate to contact us :
commercial@cahouet.com